

**CTS ACCESSORIES**

# 1-VCAP 4-VCAP

**C**rown VCAP Panels are wall-mounted panels with potentiometers that remote-control the volume of Crown CTs 4200 and CTs 8200 amplifier channels via a VCA-MC4 or VCA-MC8 module installed in the amplifier.

Two models are available: 1-VCAP and 4-VCAP.

**1-VCAP:** See Figure 1. Used in conjunction with a VCA-MC Module, this is a single-gang panel with one potentiometer that provides remote volume control for one or more CTs amplifier channels. The potentiometer on the panel is wired directly to the VCA connectors on the VCA-MC.

**4-VCAP:** See Figure 2. This is a two-gang panel with four potentiometer that provide remote volume control for four or more CTs amplifier channels. The potentiometers on the panel are wired directly to the VCA connectors on the VCA-MC.

See Crown document 135504-1, VCA-MC Series Operation Manual for installation and wiring, attenuation per detent, and theory of operation. This document is packed with the VCA-MC modules and is available online at [www.crownaudio.com](http://www.crownaudio.com).

For more details about the VCAP panels, contact the Crown Technical Support Group at 800-342-6939 or 574-294-8200.

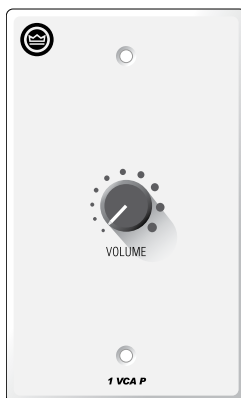


Figure 1. 1-VCAP



Figure 2. 4-VCAP

### Features

- **1-VCAP provides remote volume control for one or more CTs amplifier channels.**
- **4-VCAP provides remote volume control for four or more CTs amplifier channels.**
- **Fits into a 1-gang electrical box.**
- **Fits into a 2-gang electrical box.**

### Specifications

#### 1-VCAP

**Number of Potentiometers:** 1  
**Potentiometer Resistance:** 5 k ohms  
**Pins:** VCA, GND, +10V  
**Weight:** 3.0 oz (85 g)  
**Dimensions:** 2-1/2 in x 4-1/2 in (6.4 cm x 11.4 cm) (Fits into a 1-gang electrical box.)

#### 4-VCAP

**Number of Potentiometers:** 4  
**Potentiometer Resistance:** 5 k ohms  
**Pins:** VCA, GND, +10V (x4)  
**Weight:** 6.5 oz (184 g)  
**Dimensions:** 4-1/2 in x 4-1/2 in (11.4 cm x 11.4 cm) (Fits into a 2-gang electrical box.)

### Crown's Three-Year, No-Fault, Fully Transferable Warranty

Crown offers a Three-Year, No-Fault, Fully Transferable Warranty for almost every new Crown amplifier product—an unsurpassed industry standard. With this unprecedented No-Fault protection, your new Crown amplifier product is warranted to meet or exceed original specifications for the first three years of ownership. During this time, if your unit fails, or does not perform to original specifications, it will be repaired or replaced at our expense. About the only things not covered by this warranty are those losses normally covered by insurance and those caused by intentional abuse. And the coverage is transferable, should you sell your unit.

See your authorized Crown dealer for full warranty disclosure and details. For customers outside of the USA, please contact your authorized Crown distributor for warranty information or call 574-294-8200.

*\*Warranty is only valid within the United States of America. For information on Warranty outside of the U.S.A, please contact your local distributor.*

### HARMAN

Crown International  
P.O. Box 1000  
Elkhart, IN 46515-1000  
TEL: 574-294-8200  
FAX: 574-294-8FAX  
[www.crownaudio.com](http://www.crownaudio.com)

Specifications subject to change without prior notice. Latest information available at [www.crownaudio.com](http://www.crownaudio.com).

Crown is a registered trademark of Crown International. Other trademarks are the property of their respective owners. Printed in U.S.A.

© 2002 Crown Audio, Inc.